


# Visqueen Double Sided Jointing Tape

Page 1 of 2

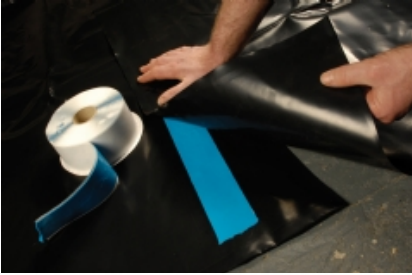


- Resists Moisture & Gas Ingression
- Excellent adhesion
- BBA Approved
- Part of the VisqueenPRO 2 part system

## Description

Visqueen Double Sided Jointing Tape is a blue double sided butyl mastic tape, supplied in 50mm x 10m rolls.

## Application

A tape for bonding Visqueen Damp Proof Membranes (DPM) at overlaps and for bonding membranes to Damp Proof Courses (DPC) at junctions with internal and external walls.



**KEY TO MATERIALS:**  
 (Refer to Visqueen Technical Data for full detailed material specifications.)

- 1) VISQUEEN ECOMEMBRANE - Laid on smooth slab or binding
- 2) VISQUEENPRO 75mm x 25m SINGLE SIDED JOINTING TAPE
- 3) VISQUEENPRO 50mm x 10m DOUBLE SIDED JOINTING TAPE
- 4) VISQUEEN TRACKGUARD 3000

NB: Ensure laps are a minimum of 250mm & fully sealed.



**VISQUEEN**  
**BUILDING PRODUCTS**

Heanor Gate, Heanor, Derbyshire DE75 7RG

T: 0845 302 4758 F: 0845 017 8663

enquiries@visqueenbuilding.co.uk

www.visqueenbuilding.co.uk

VISQUEEN BUILDING PRODUCTS IS A TRADING NAME OF BRITISH POLYTHENE LIMITED, COMPANY NUMBER: 350729, REGISTERED OFFICE: ONE LONDON WALL, LONDON, EC2Y 5AB

STRUCTURAL WATERPROOFING  
 AND GAS PROTECTION SYSTEMS

# Visqueen Double Sided Jointing Tape

Page 2 of 2

## Installation

Ensure surfaces are clean and dry. Apply tape to the lap area of the laid sheet starting approx 50mm from the membrane edge. Overlap adjoining membrane by minimum 150mm and remove tape release paper. Apply pressure to the jointed area to ensure adhesion.

For Visqueen Damp Proof Membranes and Radon Membranes, the joint/lap should then be sealed using VisqueenPro Single Sided Jointing Tape.

## Storage

When the weather is cold, store tape in a warm, dry place until required.



## TYPICAL PROPERTIES

### Technical Data

Roll dimensions	50mm x 10m
Colour	Blue
Dynamic Tensile Adhesion	>400N
Dynamic Shear Adhesion	10 N/cm <sup>2</sup>
Shelf Life	2 years
Chemical Resistance	Good to mild acids and alkalis

The information given in this datasheet is based on data and knowledge correct at the time of printing. Statements made are of a general nature and are not intended to apply to any use or application outside any referred to in the datasheet. As conditions of usage and installation are beyond our control we do not warrant performance obtained but strongly recommend that our installation guidelines and the relevant British Standard Codes of Practice are adhered to. Please contact us if you are in any doubt as to the suitability of application.

## SPECIFICATION SUPPORT

The following items are available to view online or to download from [www.visqueenbuilding.co.uk](http://www.visqueenbuilding.co.uk)

- . Technical Datasheets
- . Typical installation CAD details
- . Health and Safety data

Register online for access to NBS Clauses and for information about our CPD Seminars



## TECHNICAL SUPPORT

For advice on detailing or installation call Visqueen Building Products Technical Help Line 0845 302 4758. Pricing & Availability may be obtained from our UK Network of merchant stockists. For details of these call our Sales Office on 0845 302 4758.