


# Caviweeps / Cavivents

Caviweeps provide evacuation routes via which water arrested by trays, lintels and DPCs can discharge out of the structure. Cavivents provide ventilation apertures to permit the cavity to breathe. The specifier may select from a range varying in size, colour and functionality – some are dual function weep-vents.




## Pyramid Weep (Masonry Bleed Straw)

The Pyramid Weep is a small robust triangular conduit offering discreet and unobtrusive water evacuation. Positioning the Pyramid Weep so it 'peaks' in a perp joint permits it to be used where the bed courses are restricted or smaller than usual. Water and debris wash along its flat base that permits bedding in the lowest possible position for optimum evacuation.

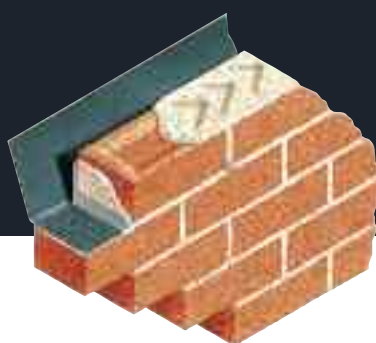

## Beak Weep (Caviweep)

The Beak Weep offers discreet water discharge via a small protruding beak. The flow path is direct to an outlet at the bottom of the beak that provides protection against directly blowing wind. The Beak Weep matches the height of a standard perp joint, but has a reduced front section.

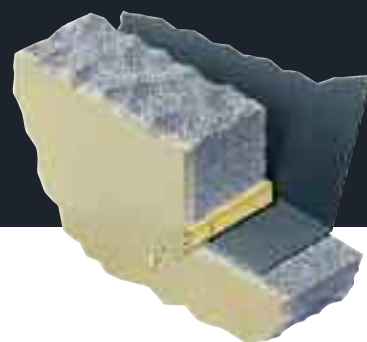

## Small Weep-vent Small Adjustable Telescopic

The Small Adjustable Weepvent offers discreet appearance with a rectangular front discharge outlet and an insect resistant grille. A removable protective flap protects the front face from being contaminated during building-in. The telescopic body of this Weepvent permits it to be lengthened or shortened to suit different masonry thickness / rendered applications.

### PRODUCT NAME - GROUP

Pyramid Weep

### CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

### DIMENSIONS

Size 1: 100mm x 8mm x 8mm

Size 2: 240mm x 8mm x 8mm

### TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

### TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

### NEW WORK APPLICATIONS

Yes

### RETROFIT APPLICATIONS

Yes

### MASONRY SKIN STYLES

Suits all

### UNDULATING MASONRY FACES

Compatible

### MATERIAL

PVCU

### COLOUR

Mortar grey

### PACK SIZE

Packs of 100 and 500

### CFC

CFC Free

### ODP

Zero

### REGULATION COMPLIANCE

Yes

### MAY BE USED IF CAVITY INSULATION PRESENT?

Yes with compliant insulation types

### CAD DOWNLOADS

No

### DESIGN CONSIDERATIONS

Discreet appearance. Position at greater frequency than Perp Weeps. Min 200mm centres for arrestment evacuation and as required to bleed / drain features.

### PRODUCT NAME - GROUP

Beak Weep

### CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

### DIMENSIONS

Weep: 108mm x 65mm x 8mm

Ex duct: 200mm x 65mm x 9mm

### TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

### TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

### NEW WORK APPLICATIONS

Yes

### RETROFIT APPLICATIONS

Yes

### MASONRY SKIN STYLES

Suits all

### UNDULATING MASONRY FACES

Compatible

### MATERIAL

Polyprop

### COLOUR

Translucent

### PACK SIZE

Packs of 50

### CFC

CFC Free

### ODP

Zero

### REGULATION COMPLIANCE

Yes

### MAY BE USED IF CAVITY INSULATION PRESENT?

Yes with compliant insulation types

### CAD DOWNLOADS

No

### DESIGN CONSIDERATIONS

Suggested centres 450mm. Extension duct available.

### PRODUCT NAME - GROUP

Small Adjustable Telescopic Weepvent

### CAVITY WIDTHS ACCOMMODATED

All – width does not affect functionality

### DIMENSIONS

93mm x 24mm x 9.5mm

Extends additional 70mm max

### TRADITIONAL CONSTRUCTION COMPATIBLE

Yes

### TIMBER FRAME CONSTRUCTION COMPATIBLE

Yes

### NEW WORK APPLICATIONS

Yes

### RETROFIT APPLICATIONS

Yes

### MASONRY SKIN STYLES

Suits all

### UNDULATING MASONRY FACES

Compatible

### AIR FLOW AT GRILLE

60mm<sup>2</sup> aperture total

### MATERIAL

Polyprop

### COLOURS

Clear, grey, terracotta, beige, black

### PACK SIZE

Packs of 100

### CFC

CFC Free

### ODP

Zero

### REGULATION COMPLIANCE

Yes

### MAY BE USED IF CAVITY INSULATION PRESENT?

Yes with compliant insulation types

### CAD DOWNLOADS

No

### DESIGN CONSIDERATIONS


Suggested centres 450mm.



## Type W Caviweep-Vent

The Type W is a dual-function combined weep and ventilator. It is finished with an inclined insect resistant grille that promotes excellent air flow with the accompanying benefit of internal baffles to arrest wind-driven rain entering. The Type W makes use of positive and negative air pressure to aid functionality. It permits the cavity to breathe and evacuate water from lintels, trays and DPCs.


<b>PRODUCT NAME - GROUP</b>	Type W Caviweep-Vent
<b>CAVITY WIDTHS ACCOMMODATED</b>	All – width does not affect functionality
<b>DIMENSIONS</b>	Type W - 105mm x 65mm x 9.5mm Ext duct – 200/225mm x 65mm x 10mm
<b>TRADITIONAL CONSTRUCTION COMPATIBLE</b>	Yes
<b>TIMBER FRAME CONSTRUCTION COMPATIBLE</b>	Yes
<b>NEW WORK APPLICATIONS</b>	Yes
<b>RETROFIT APPLICATIONS</b>	Yes
<b>MASONRY SKIN STYLES</b>	Suits all
<b>UNDULATING MASONRY FACES</b>	Compatible
<b>AIR FLOW AT GRILLE</b>	320mm <sup>2</sup>
<b>MATERIAL</b>	Polyprop
<b>COLOURS</b>	Grey, black, beige, brown, white, clear & terracotta to merge with wall/mortar
<b>PACK SIZE</b>	Packs of 50
<b>CFC</b>	CFC Free
<b>ODP</b>	Zero
<b>REGULATION COMPLIANCE</b>	Yes
<b>SIGNERS' COMMENTS</b>	MAY BE USED IF CAVITY INSULATION PRESENT? Yes with compliant insulation types: the external leaf not
<b>CAD DOWNLOADS</b>	Yes As there is a 150mm in height constraint
<b>DESIGN CONSIDERATIONS</b>	Yes Additional technical requirements: clean, intact in Buildings Additional DPC protection provided

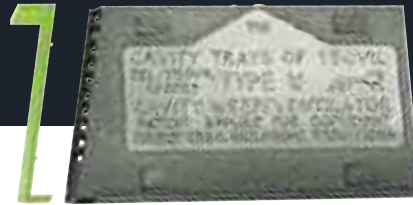

## Type W Render Cover

**Type W Extension Duct** - Extension duct for connection to rear of Type W to provide lengthened version to service masonry skins of increased thickness. Can be cut on site if required.  
**Type W Render Cover** - Florescent coloured cover clips to front of Type W to provide protection and keep grille free of contamination during rendering or similar works.

<b>PRODUCT NAME - GROUP</b>	Type W Extension Duct
<b>DIMENSIONS</b>	200/225 x 65 x 10mm
<b>AIR FLOW RATING</b>	300mm <sup>2</sup>
<b>MATERIAL</b>	Polypropylene
<b>COLOUR</b>	Grey
<b>BOXED</b>	Packs contain 50 extensions.

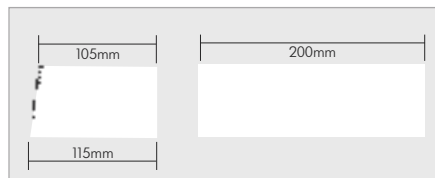

## Type W Extension Duct

<b>PRODUCT NAME - GROUP</b>	Type W Cover
<b>DIMENSIONS</b>	68 x 10mm
<b>MATERIAL</b>	Polypropylene
<b>COLOUR</b>	Florescent green
<b>BOXED</b>	Packs contain 50 covers



## Euroweep-vent

The compact Euroweep-vent provides ventilation to the cavity and an exit route through which water can discharge from trays, lintels and DPCs. Compact size, high air flow rating and minimalist vertical front provide a compromise visually between full perp and small alternatives.

<b>PRODUCT NAME - GROUP</b>	Euroweep-vent
<b>CAVITY WIDTHS ACCOMMODATED</b>	All – width does not affect functionality
<b>DIMENSIONS</b>	87mm x 49mm x 9mm
<b>TRADITIONAL CONSTRUCTION COMPATIBLE</b>	Yes
<b>TIMBER FRAME CONSTRUCTION COMPATIBLE</b>	Yes
<b>NEW WORK APPLICATIONS</b>	Yes
<b>RETROFIT APPLICATIONS</b>	Yes
<b>MASONRY SKIN STYLES</b>	Suits all
<b>UNDULATING MASONRY FACES</b>	Compatible
<b>AIR FLOW AT GRILLE</b>	300mm <sup>2</sup>
<b>MATERIAL</b>	Polyprop
<b>COLOURS</b>	Grey, black, beige, brown, white, clear & terracotta to merge with wall/mortar
<b>PACK SIZE</b>	Packs of 50
<b>CFC</b>	CFC Free
<b>ODP</b>	Zero
<b>REGULATION COMPLIANCE</b>	Yes
<b>MAY BE USED IF CAVITY INSULATION PRESENT?</b>	Yes with compliant insulation types
<b>CAD DOWNLOADS</b>	Yes
<b>DESIGN CONSIDERATIONS</b>	Suggested centres 675mm